



# Vertiv™ PowerIT Rack Transfer Switch

Ultimate Reliability in  
Mission-Critical Power




# Vertiv™ PowerIT Rack Transfer Switch

## Safeguard Your Critical IT Infrastructure in the Event of a Power Failure.

The Vertiv™ PowerIT Rack Transfer Switch delivers redundant power to single corded devices. Two independent power inputs enables users to connect to a primary and secondary power source. The Vertiv™ PowerIT Rack Transfer Switch automatically detects the loss of power and switches the power load to the alternative power source in less than 4-8 milliseconds without the need for human intervention. Maintaining power to the equipment until the primary power source returns providing ultimate mission-critical power reliability.

The Vertiv™ PowerIT Rack Transfer Switch is an open transition switch utilizing a break-before-make process for transferring between the primary and secondary power source. This method of switching does not require phase synchronization between the two power feeds making it suitable for use in both data center and edge locations. It also includes enhanced redundant switches and fail-safe fused thermistors to mitigate current surge during transfers ensuring critical equipment is protected during fail-over.



Front view



Rear view

*The Vertiv™ PowerIT Rack Transfer Switch provides the widest range of configuration options to support redundancy strategies in most data center and edge applications.*

### Upgradeable Technology

The Rack Transfer Switch utilizes the evolutionary upgradeable technology used in the Vertiv™ PowerIT rack PDUs. It provides users with the flexibility to install the intelligence they require today, with the option to upgrade technology as needs evolve. From basic power to power monitoring, the Vertiv™ PowerIT Upgradeable product line adapts to your business well into the future.

### Enhanced Intelligence

Intelligent models provide a comprehensive view of critical IT equipment power usage at the rack or via remote access. Set user-defined thresholds to receive notifications when power and environmental conditions fall outside the desired range. Outlet level monitored units provide a granular view of equipment power usage, and Switched models enable users to turn-on, turn-off, or reboot individual outlets.

*Available in a variety of single phase electrical and receptacle configurations with different intelligence options.*

## At A Glance

### Intelligence Type

- Basic Upgradable
- Unit Level Monitored
- Outlet Level Monitored
- Switched Unit Level Monitored
- Switched Outlet Level Monitored

### Rack Mount Configuration

- 1U and 2U Horizontal

### Global Compliance

- UL Listed and CE Marked

### Voltage Range


- 100-240V

### Amperage Range

- 10A, 15A, 16A, 20A, 30A, and 32A

### Receptacle Type

- Combination C13/C19, U-Lock C13, NEMA 5-15R and NEMA 5-20R
- L6-30C and IEC 2P+E IP44

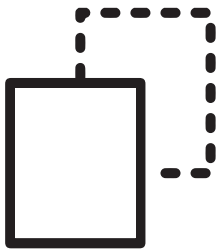


### Easy to Use Front Panel Interface

The front panel interface provides visual identification of the active power source and allows users to do a manual transfer to the secondary power source remotely or with the touch of a button to perform equipment maintenance.




### <4-8ms Transfer Speed

When power is lost on the primary source, the Vertiv™ PowerIT Rack Transfer Switch transfers to the backup or secondary source in under 4-8 milliseconds to ensure critical IT equipment continues to receive power during a power outage.

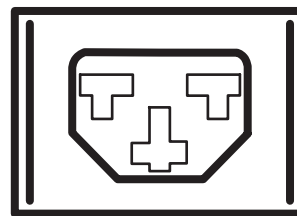

### Combination Outlet C13/C19

Select models come equipped with the Combination Outlet C13/C19 accommodating either a C14 or C20 power cable in the same outlet without the need for an adapter. The 2-in-1 outlet simplifies the buying process and offers greater flexibility to accommodate ever-changing rack power requirements.

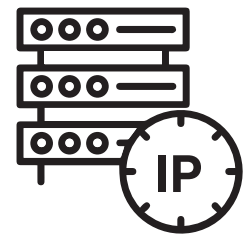


### Vertiv™ Intelligence Director

Streamline deployment with IP aggregation of up to 50 supported Vertiv™ devices on a single IP address with self-configuration of downstream devices.

# Vertiv™ PowerIT Rack Transfer Switch

## Typical Configuration Diagrams

The Rack Transfer Switch offers ultimate deployment flexibility. Here are three common rack configurations to incorporate the Rack Transfer Switch into critical infrastructure.

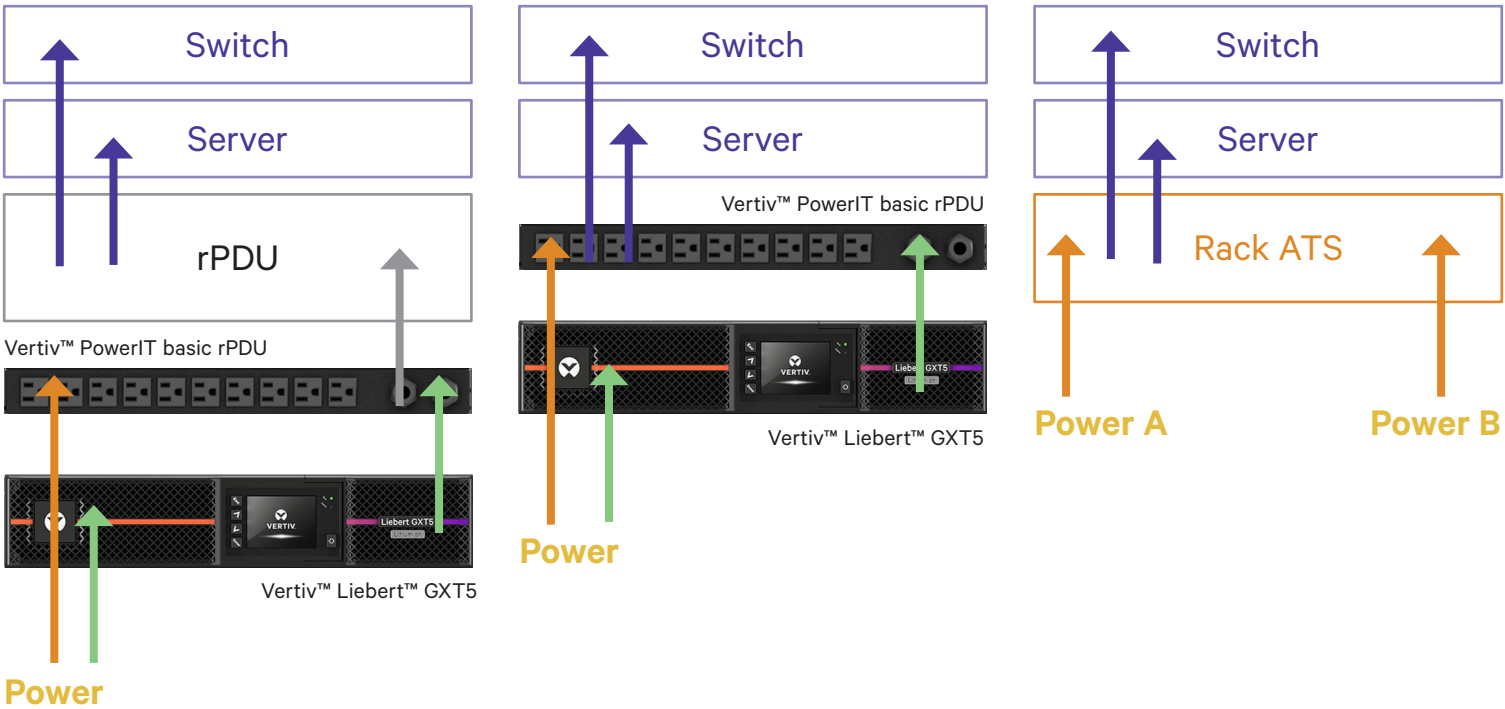

## Reference Rack Transfer Switch Models

| Stocking Location | Model    | Category             | Sub Category                     | Form Factor | Volts    | Amps       | Max kW                                   | Plug Type       | Receptacle Qty / Type             | Max Operating Temp* | VI Director |
|-------------------|----------|----------------------|----------------------------------|-------------|----------|------------|--|-----------------|-----------------------------------|---------------------|-------------|
| AMER              | VA4U11A0 | Rack Transfer Switch | Monitored Unit Level             | 1U          | 100-240V | 10A or 15A | 1.4kW (120V), 2.4kW (208V), 2.3kW (230V) | (2) C14 Inlet   | (10) U-Lock C13                   | 60°C                | YES         |
| AMER              | VA4N11A0 | Rack Transfer Switch | Monitored Unit Level             | 1U          | 100-120V | 15A        | 1.4kW (120V)                             | (2) NEMA 5-15P  | (10) NEMA 5-15R                   | 60°C                | YES         |
| AMER              | VA4N21A0 | Rack Transfer Switch | Monitored Unit Level             | 1U          | 100-120V | 20A        | 1.9kW (120V)                             | (2) NEMA 5-20P  | (10) NEMA 5-20R                   | 60°C                | YES         |
| AMER              | VA4N31A0 | Rack Transfer Switch | Monitored Unit Level             | 1U          | 200-240V | 30A        | 4.9kW (208V)                             | (2) NEMA L6-30P | (1) NEMA L6-30C (Corded Output)   | 60°C                | YES         |
| EMEA              | VA7U21A0 | Rack Transfer Switch | Switched Outlet Level Monitoring | 1U          | 100-240V | 16A or 20A | 1.9kW (120V), 3.3kW (208V), 3.6kW (230V) | (2) C20 Inlet   | (6) Combination Outlet C13 / C19  | 60°C                | YES         |
| EMEA              | VA4U21A0 | Rack Transfer Switch | Monitored Unit Level             | 1U          | 100-240V | 16A or 20A | 1.9kW (120V), 3.3kW (208V), 3.6kW (230V) | (2) C20 Inlet   | (12) Combination Outlet C13 / C19 | 60°C                | YES         |
| EMEA              | VA7G32A0 | Rack Transfer Switch | Switched Outlet Level Monitoring | 2U          | 200-240V | 32A        | 7.3kW (230V)                             | (2) 1P+N+E      | (12) Combination Outlet C13 / C19 | 60°C                | YES         |
| EMEA              | VA4G31A0 | Rack Transfer Switch | Monitored Unit Level             | 1U          | 200-240V | 32A        | 7.3kW (230V)                             | (2) 1P+N+E      | (12) Combination Outlet C13 / C19 | 60°C                | YES         |

| Model    | Form Factor  |
|----------|--|
| VA4N11A0 | Monitored Rack ATS, Unit-Level<br>Horizontal<br>5-15P (Dual Input)<br>1U<br>(10) 5-15R |
| VA4N21A0 | Monitored Rack ATS, Unit-Level<br>Horizontal<br>5-20P (Dual Input)<br>1U<br>(10) 5-20R |

