



FRONT VIEW

FOR DETAIL  
SEE DRAWING GXT5-DISPLAY

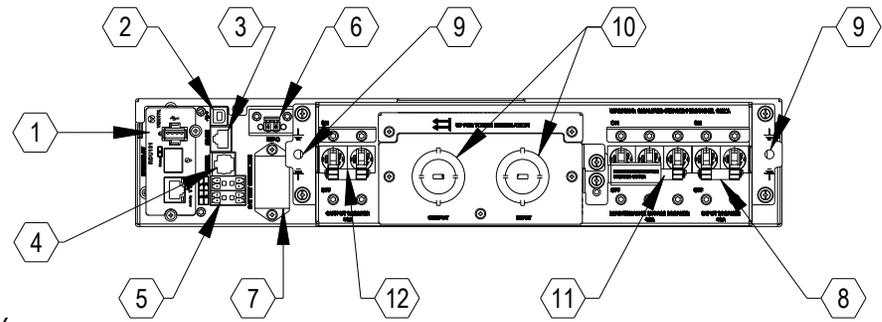

REAR VIEW

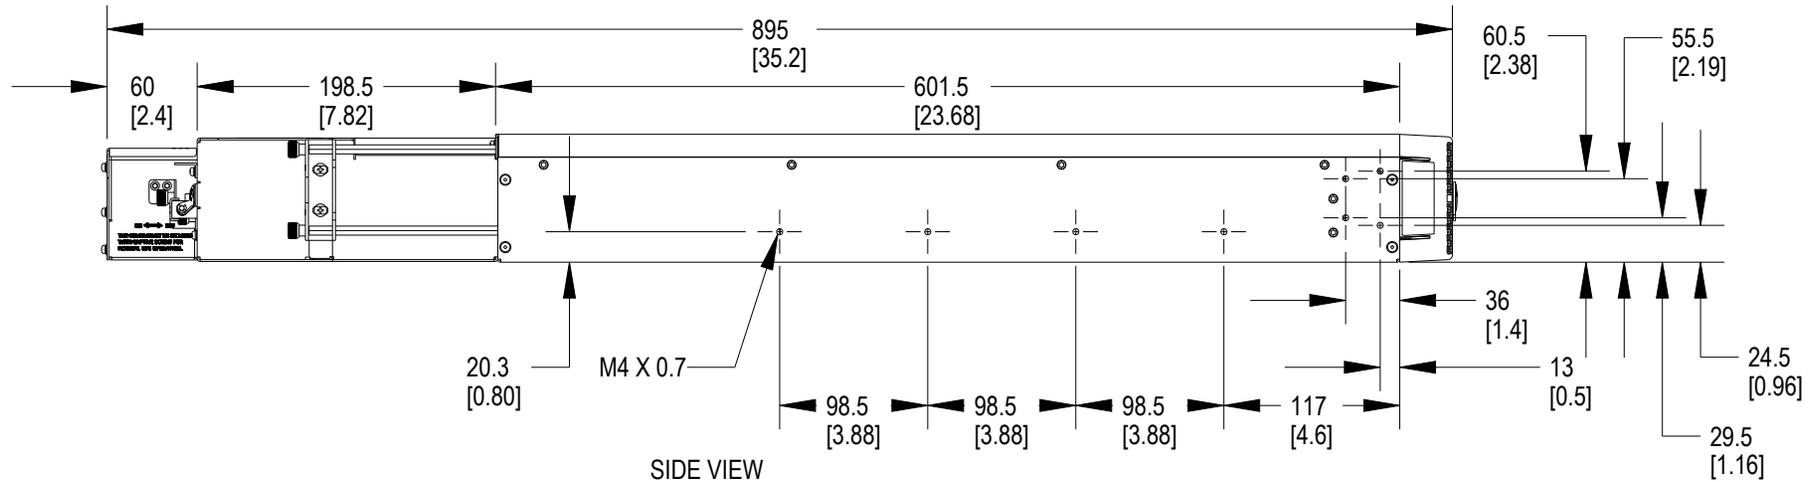

SIDE VIEW

- 1 INTELLISLOT PORT
- 2 USB PORT
- 3 EXTERNAL BATTERY CABINET COMMUNICATION PORT [RS485]
- 4 RS232 PORT
- 5 TERMINAL BLOCK COMMUNICATION
- 6 REPO
- 7 EXTERNAL BATTERY CONNECTOR
- 8 40A INPUT CIRCUIT BREAKER
- 9 GROUND SCREW
- 10 HARDWIRED INPUT/OUTPUT POWER CONNECTIONS
- 11 40A MAINTENANCE BYPASS CIRCUIT BREAKER
- 12 40A OUTPUT CIRCUIT BREAKER

NOTES

1. UNIT DIMENSIONS (WxDxH) 430mm x 895mm x 85mm (2U)  
(16.9") x (35.2") x (3.3")
2. UNIT WEIGHT WITH EBC: 45.4kg (100.0lbs)
3. UNIT WEIGHT WITHOUT EBC: 23.4kg (51.5lbs)
4. SHIPPING DIMENSIONS (WxDxH) 798mm x 999mm x 532mm  
(31.4") x (39.3") x (20.9")
5. SHIPPING WEIGHT 72kg (158.7lbs)
6. MINIMUM AIRFLOW CLEARANCE IS 100mm (4.0")  
FRONT AND REAR.




SHEET NO. 1 OF 1	DRAWN BY: ANIKET PATIL	TITLE <b>OUTLINE DRAWING LIEBERT GXT5 LITHIUM-ION 6000VA 120/208 VAC RACK/TOWER UPS</b>
CO. NO. -	DESIGNED BY: P BENNER	
REF DWG. -	APPROVED BY: N SECORD	

DWG. NO. GXT5_LI_6000MVRT3UXLN	DATE (LATEST REV.) 07/29/2022
REVISION 0	



2

1

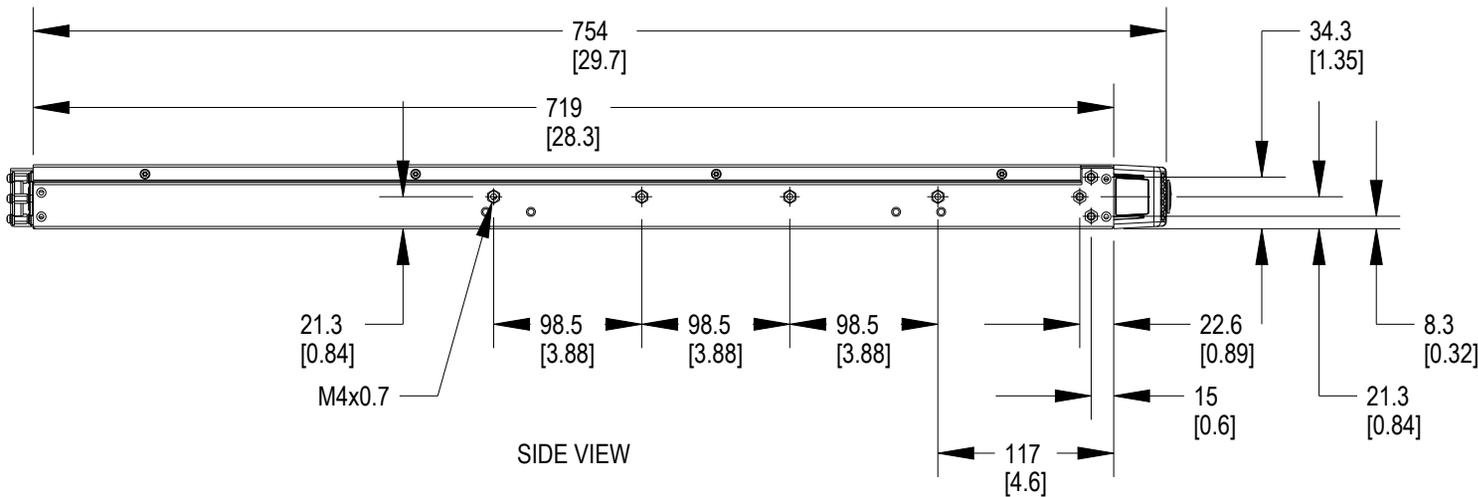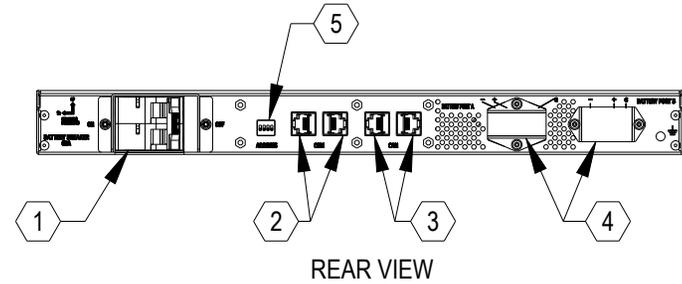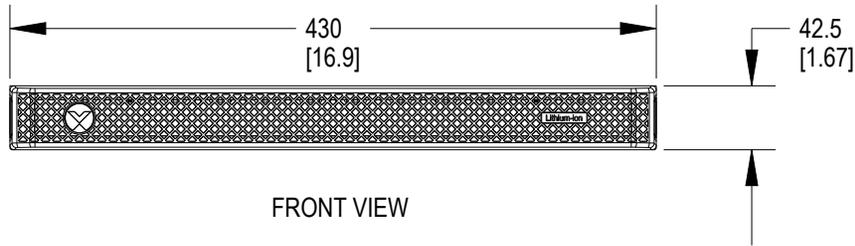

- ① OUTPUT CIRCUIT BREAKER (63A)
- ② EXTERNAL BATTERY CABINET COM PORTS
- ③ EXTERNAL BATTERY CABINET CAN PORTS
- ④ EXTERNAL BATTERY CABINET POWER CONNECTORS
- ⑤ ADDRESS DIP SWITCH

NOTES

- 1. UNIT DIMENSIONS (WxDxH) 430mm x 754mm x 42.5mm (1U)  
(16.9" x 29.7" x 1.7")
- 2. UNIT WEIGHT: 22kg (48.5lbs)
- 3. SHIPPING DIMENSIONS (WxDxH) 800mm x 1000mm x 285mm  
31.4" x 39.3" x 11.2"
- 4. SHIPPING WEIGHT 48.5kg (106.9lbs)
- 5. MINIMUM AIRFLOW CLEARANCE IS 100mm (4.0")  
FRONT AND REAR.

SHEET NO. 1 OF 1	DRAWN BY: AVINASH PATIL
CO. NO. -	DESIGNED BY: P BENNER
REF DWG. -	APPROVED BY: N SECORD

<p><b>OUTLINE DRAWING</b> LIEBERT GXT5 LITHIUM-ION 5-10kVA 192V EXTERNAL BATTERY CABINET</p>	DWG. NO. VEBCLI-192VRT1U
	DATE (LATEST REV.) 10-AUG-22
	REVISION 0

1050 DEARBORN DR P.O. BOX 29186 COLUMBUS, OH 43229
--



2

1